

Hot foil (digital) + CMYK print

Finish is only possible on the front page!

The coating is created using a full-tone colour – a fifth colour in addition to the four CMYK colours.

To create full-tone colours, a graphic design software is necessary.

Do not use MS Office programmes to create these print files!

Instructions

- ☐ Create a full-tone colour and name it **spot**
This full-tone colour is freely selectable – we recommend using magenta to better distinguish it from your design.
- ☐ Place all finished elements on the top layer.
- ☐ Fill these elements with the full-tone colour **spot**
- ☐ **Select all finished elements and set them to “overprinting on”.**

Checklist



- ☐ Your design may only contain **one** full-tone colour
- ☐ Use vector files only for finished elements
- ☐ Tonal value has to be 100 % – do not use colour grids or half-tone values
- ☐ Do not use any graphic effects such as distortions, transparencies, cast shadows etc.
- ☐ Bleed off edge possible

- ☐ Minimum font size 4 mm (small letters), approx. 22 pt, regular or bold – sans serif fonts
- ☐ Positive lines at least 1 pt (0,35 mm)
- ☐ Negative lines at least 1 pt (0,35 mm)
- ☐ Distance between single elements at least 1 pt (0,35 mm)

Upload only possible with PDF single pages!

Labels on a roll including dispenser box

Round, 35 mm diameter

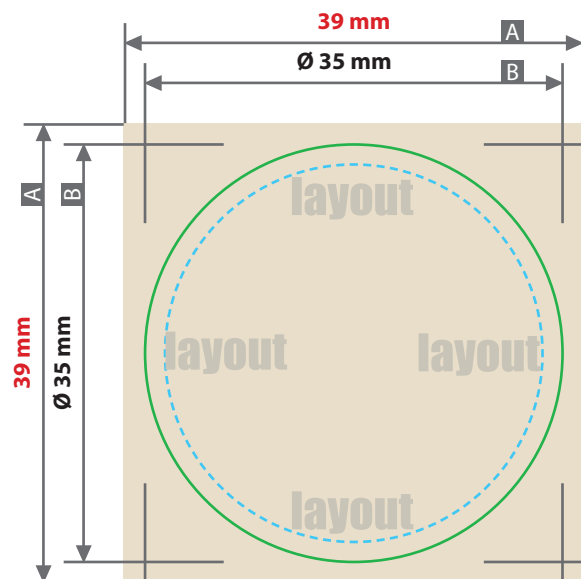

Bleed (x)

2 mm

Safety distance (y)

2 mm

A = file format

B = finished size

--- safety distance

File format

Please create backgrounds and bled off images up to the edge of the file format in order to avoid any blank streaks (white edges).

Safety distance

Adhere to safety distance (y) for text, logos and important elements.

Labels on a roll

The labels are placed on the roll in the finished **punched size**.