


Lanyards  
25 mm, with safety lock

Exterior



Interior (only necessary for double-sided printing)

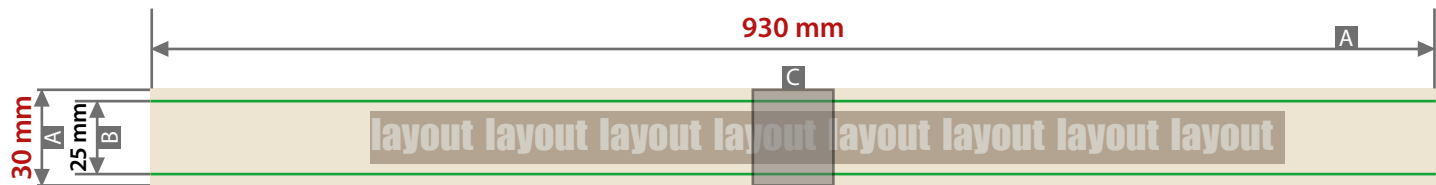

See appendix:

- ① 1:1 template, external side
- ② 1:1 template, internal side

**! ATTENTION:** Please remove the template before saving the print file!

Sketches are not to scale

A = file size  
B = product size  
C = safety lock  
■ = optimal visible area (6 mm)

- ! Data delivery:**
- as PDF/X-4
  - fonts and logos vectorised
  - minimum font height: 3.6 mm (lower case)
  - min. thickness of the lines 0.86 pt (0.3 mm)
  - Image resolution: 300 ppi minimum

- ! Please ensure that the option “overprint area” is deactivated.**
- ! Due to production reasons, it is possible that the cut mark is visible at the end of the wristband.**
- ! Only a continuous print possible on the inside of the lanyard!**  
It is not guaranteed that the print on the inside is exactly in the same place as on the outside. One exception is the satin material, which can be printed with a precise fit.

