


Lanyards**25 mm, with safety lock**


Exterior



Interior (only necessary for double-sided printing)

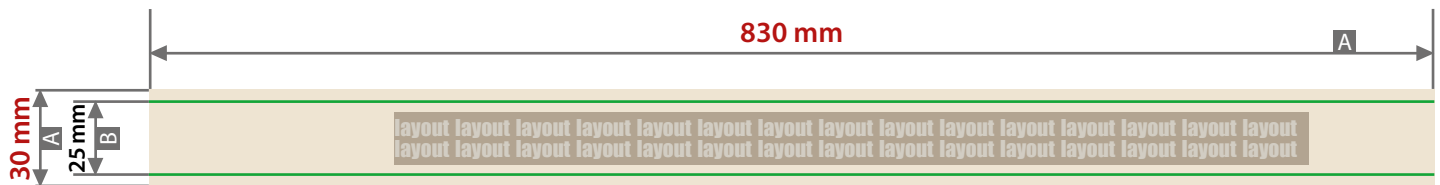

External safety lock

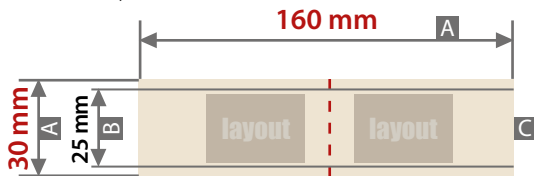

Interior safety lock (only necessary for double-sided printing)



Design example 1



Design example 2

**See appendix:**

- ① 1:1 template, external side
- ② 1:1 template, internal side
- ③ 1:1 template, external side safety lock
- ④ 1:1 template, internal side safety lock

! ATTENTION: Please remove the template before saving the print file!

Sketches are not to scale

A = file size
 B = product size
 C = ribbon for clip buckle
 ■ = optimal visible area (21 mm)
 ■ = partially visible area
 Only create the background here!


! Data delivery:


- as PDF/X-4
- fonts and logos vectorised
- minimum font height: 3.6 mm (lower case)
- min. thickness of the lines 0.86 pt (0.3 mm)
- Image resolution: 300 ppi minimum


! Please ensure that the option "overprint area" is deactivated.

! Due to production reasons, it is possible that the cut mark is visible at the end of the wristband.

! Only a continuous print possible on the inside of the lanyard!
 It is not guaranteed that the print on the inside is exactly in the same place as on the outside. One exception is the satin material, which can be printed with a precise fit.

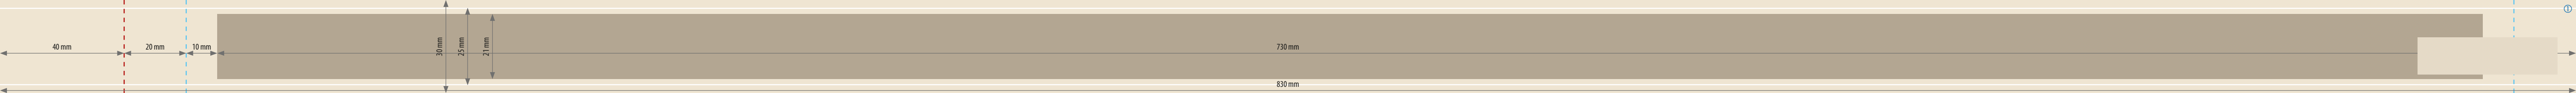

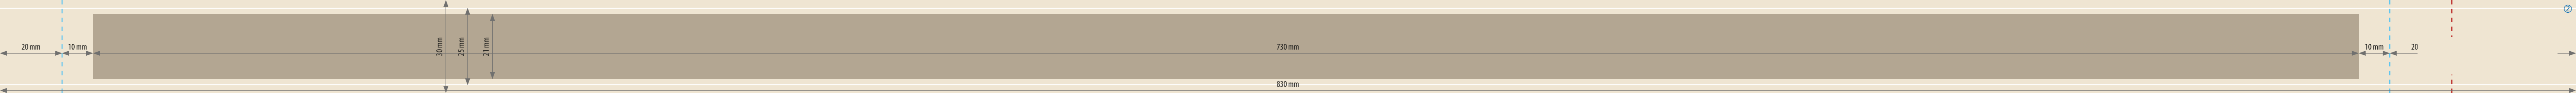

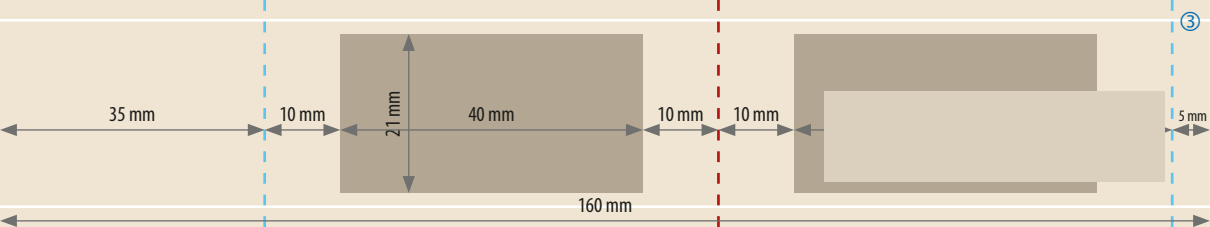



30 mm

160 mm

4